

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T4S R8W

C1/4


SEC 14

U.S.B.&M.

P-19



SCALE: 1"=30'

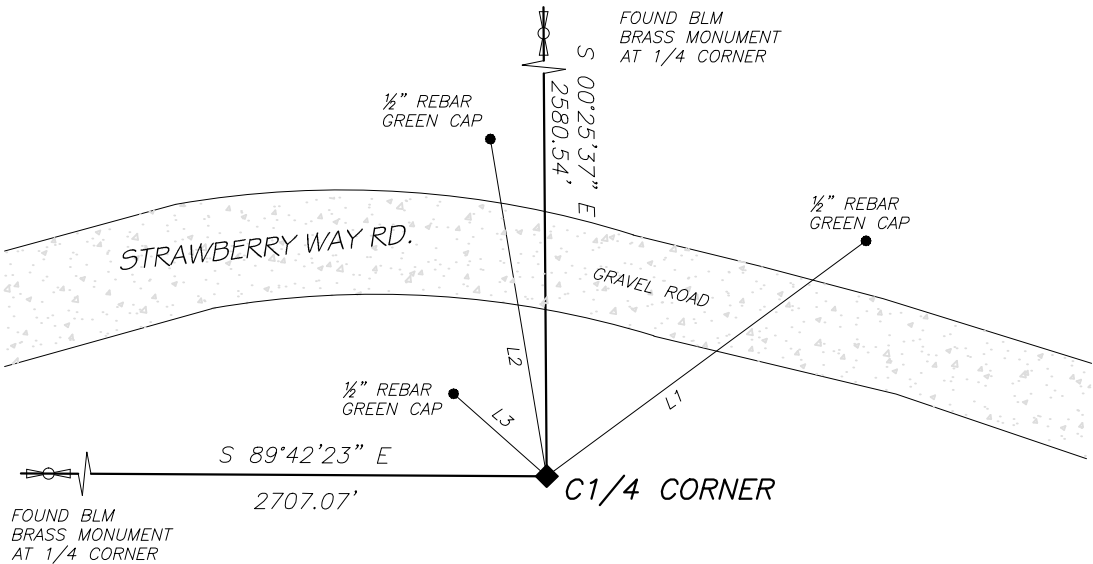

LINE	BEARING	DISTANCE
L1	N 53°37'17" E	61.98'
L2	N 09°29'47" W	53.39'
L3	N 48°28'54" W	19.43'

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM  
G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER)  
LOCATED AT LAT. 40°09'16.01931"N AND LONG.  
110°45'51.61780"W USING THE UTAH STATE G.P.S. VIRTUAL  
REFERENCE STATION CONTROL NETWORK MAINTAINED AND  
OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A BLM ALUMINUM PIPE AND CAP  
MONUMENT AT POSITION OF CENTER 1/4  
CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES  
ESTABLISHED TO PERPETUATE THE ORIGINAL  
LOCATION OF THE CORNER

SET THREE 1/2" REBAR WITH GREEN PLASTIC CAPS  
MARKED "REFERENCE MARKER" AS REFERENCE  
POINTS AND REFERENCED AS SHOWN



PHOTO OF MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7217940.773  
E: 1848783.110  
NAVD88 EL: 6558.60'

LATITUDE: 40°07'57.84063" N  
LONGITUDE: 110°45'17.09385" W  
ELLIPSOID HEIGHT: 6505.12'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300040S0080W0\_540440



PHOTO OF MONUMENT FACING SOUTH

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do  
hereby certify that I have performed or reviewed the work done on the  
diagrammed corner as reported on this recordation form and approve same

Date 22 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

